

# BaseLine

## Drying cabinet TS 43 / TS 43 HP - Commercial

### MAIN FEATURES

- Capacity 6 kg (13.2 lbs) resp. 4 kg (8.8 lbs)
- Hanging length 16 m (52,5 ft)
- Energy consumption 2,5 resp. 1,2 kWh
- Compact design
- Control panel with LCD
- Two humidity controlled automatic programs
- Additional Timed drying - TS 43
- Optional ventilated shelving
- 3 x extendible and retracting hanging racks
- Reversible door hanging - TS 43
- Overheat protection
- Auto cool down at end of cycle



Versatile garment drying solution for every industry.

TS 43 and TS 43 HP are excellent drying cabinets, perfect for rooms where space is limited. The cabinets are 60 cm (23.4 inches) wide. TS 43 E holds 6 kg (13.2 lbs) of garments and TS 43 HP holds 4 kg (8.8 lbs) of garments. They are equipped with an extendible and retracting hanging system which simplifies the loading operation and maximises space utilisation.

Ideal for drying outerwear for commuters or outdoor workers. In TS 43 all controls and electrical components are placed in a pull-out fan package which makes it easy to repair and maintain. TS 43 HP uses refrigerated heat pump technology to negate the need for external venting.

HTS - Humidity Tracking System 

Main data	TS 43	TS 43 HP
Capacity, kg/lbs	6 (13.2)	4 (8.8)
Type	16 (52.5)	16 (52.5)
Heating effect, kW	1.5	-
Part no	131043	131048


### Consumption data, normal temperature\*

Drying time, min	85	90
Drying Capacity, g/min	40	22

\*Drying of 4 kg cotton (dry weight) washed and high-spinned.

# Technical specifications Baseline TS 43/TS 43 HP

Drying Cabinet	TS 43	TS 43 HP
<b>Electrical connections</b>		
Phase/Voltage/Frequency	1~N/230V/50-60Hz	1~N/230V/50-60Hz
Total effect, kW	2.04	0.9
Fuse, A	10	10
Cable length, mm (inch)	2400 (94.5)	2500 (98.4)
<b>Air connections</b>		
Outlet exhaust, $\varnothing$ mm (inch)	100 (3.93)	-
Outlet air flow, m <sup>3</sup> /h (ft <sup>3</sup> /h)	95 (3355)	-
<b>Heat pump</b>		
Condensate pipe, $\varnothing$ mm (inch)	-	13 (1/2)
Refrigerant	-	R407C
Amount of refrigerant, g (oz)	-	300 (10.6)
<b>Optional extras</b>		
Air exchanger 1 vent., part no	141009	-
Air exchanger 2 vent., part no	141018	-
<b>Airborne sound level, dB(A)</b>	55	52
<b>Weight</b>		
Net, kg (lbs)	60 (132)	95 (209)
Shipping data net, kg (lbs)	65 (143)	100 (220)

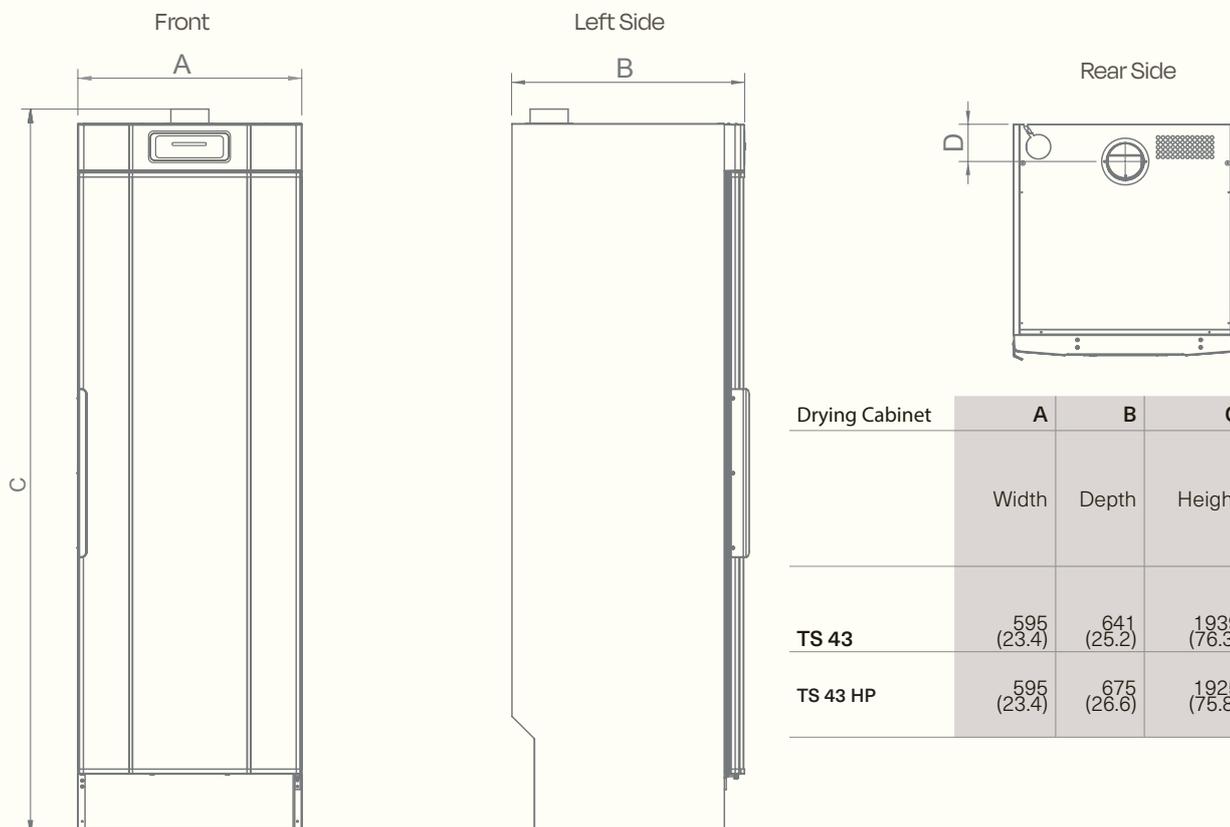

Drying Cabinet	A	B	C	D
	Width	Depth	Height	Exhaust position from back
<b>TS 43</b>	595 (23.4)	641 (25.2)	1939 (76.3)	100 (3.9)
<b>TS 43 HP</b>	595 (23.4)	675 (26.6)	1925 (75.8)	-

