

BaseLine

Drying cabinet TS 43 / TS 4 VP - Commercial

MAIN FEATURES

- Capacity 6 kg (13.2 lbs) resp. 4 kg (8.8 lbs)
- Hanging length 16 m (52,5 ft)
- Energy consumption 2,5 resp. 1,2 kWh
- Compact design
- Control panel with LCD
- · Two humidity controlled automatic programs
- · Additional Timed drying TS 43
- Optional ventilated shelving
- 3 x extendible and retracting hanging racks
- Reversible door hanging TS 43
- Overheat protection
- · Auto cool down at end of cycle



TS 43 and TS 4 VP are excellent drying cabinets, perfect for rooms where space is limited. The cabinets are 60 cm (23.4 inches) wide. TS 43 E holds 6 kg (13.2 lbs) of garments and TS 4 VP holds 4 kg (8.8 lbs) of garments. They are equipped with an extendible and retracting hanging system which simplifies the loading operation and maximises space utilisation.

Ideal for drying outerwear for commuters or outdoor workers. In TS 43 all controls and electrical components are placed in a pull-out fan package which makes it easy to repair and maintain. TS 4 VP uses refrigerated heat pump technology to negate the need for external venting.

HTS - Humidity Tracking System %

Main data	TS 43	TS 4 VP
Capacity, kg/lbs	6 (13.2)	4 (8.8)
Туре	16 (52.5)	16 (52.5)
Heating effect, kW	1.5	-
Part no	131043	131040

Consumption data, normal temperature*

Drying time, min	85	90
Drying Capacity, g/min	40	22


^{*}Drying of 4 kg cotton (dry weight) washed and high-spinned.





Technical specifications Baseline TS 43/TS 4 VP

Drying Cabniet	TS 43	TS 4 VP
Electrical connections		
Phase/Voltage/Frequency	1~N/230V/50-60Hz	1~N/230V/50-60Hz
Total effect, kW	2.04	0.9
Fuse, A	10	10
Cable length, mm (inch)	2400 (94.5)	2500 (98.4)
Air connections		
Outlet exhaust, ø mm (inch)	100 (3.93)	-
Outlet air flow, m ³ /h (ft3/h)	95 (3355)	-
Heat pump		
Condensate pipe, Ø mm (inch)	-	13 (1/2)
Refrigerant	-	R407C
Amount of refrigerant, g (oz)	-	300 (10.6)
Optional extras		
Air exchanger 1 vent., part no	141009	-
Air exchanger 2 vent., part no	141018	-
Airborne sound level, dB(A)	55	52
Weight		
Net, kg (lbs)	60 (132)	95 (209)
Shipping data net, kg (lbs)	65 (143)	100 (220)



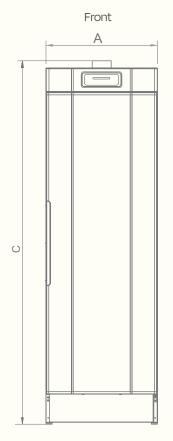

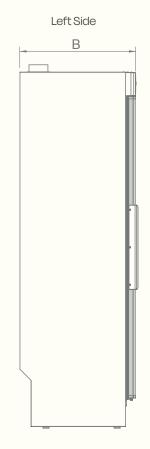



Drying Cabniet	Α	В	С	D
	Width	Depth	Height	Exhaust position from back
TS 43	595 (23.4)	641 (25.2)	1939 (76.3)	100 (3.9)
TS 4VP	595 (23.4)	675 (26.6)	1925 (75.8)	-

