

Proline

Drying cabinet TS 93 E

MAIN FEATURES

- Capacity 16 kg (35.3 lbs)
- Hanging length 32 m (105 ft)
- Width, 180 cm (71 inch)
- HTS - Humidity Tracking System
- Gentle drying mode
- Four automatic programs and one program for timed drying
- Hanging rail rotates out 90° and doors open 190°
- Double overheat protection for increased security
- Removable top panel for easy installation/handling
- Choose between Swedish, English, Norwegian, Danish, French, German and Spanish display texts
- Delivered as an assembling kit



ProLine TS 93 E, has the capacity to dry great amounts of laundry in a very short time and is ideal for drying rugs or larger textiles such as sheets, curtains etc. The drying cabinet is energy efficient. The energy consumption is only 6.4 kWh. ProLine TS 93 E is equipped with the Humidity Tracking System (HTS). HTS measures the level of humidity every single second, to determine exactly when the textiles are dry. ProLine TS 93 E has four automatic programs and one program for timed drying.

HTS - Humidity
Tracking System 

Main data	TS 63 VP
Capacity, kg/lbs	16 (35.3)
Hanging length, m (ft)	32 (105)
Heating effect, kW	9.0
Part no	131034


Consumption data, normal temperature*

Drying time, min	64
Energy consumption, kWh	6.4
Drying capacity, g/min (oz/min)	45 (1.59)

*Drying of 12 kg cotton (dry weight), washed and high-spinned to 43 % residual moisture, dried to 0 % residual moisture.

Technical specifications Proline TS 93 E

Drying Cabniet	TS 93 E
Electrical connections	
Phase/Voltage/Frequency	3~N/400V/50Hz
Total effect, kW	9.5
Fuse, A	16
Cable length, mm (inch)	2500 (98.4)
Air connections	
Outlet exhaust, ø mm (inch)	160 (6.3)
Outlet air flow, m³/h* (ft³/h*)	300 (10594)
Pressure drop, max Pa* (psf*)	260 (5.43)
Optional extras	
Single bar, part no	131072
Hook rack, set of three, part no	131071
Air exchanger 1 vent., part no	141009
Air exchanger 2 vent., part no	141018
Airborne sound level, dB(A)	
	65
Weight	
Net, kg (lbs)	235 (518)
Shipping data net, kg (lbs)	275 (606))
Minimum ceiling height mm (inch)	
	2215 (87.2)
Shipping dimensions WxDxH packed, mm (inch)	
	1915x790x1060 (75.4x31.1x41.7)

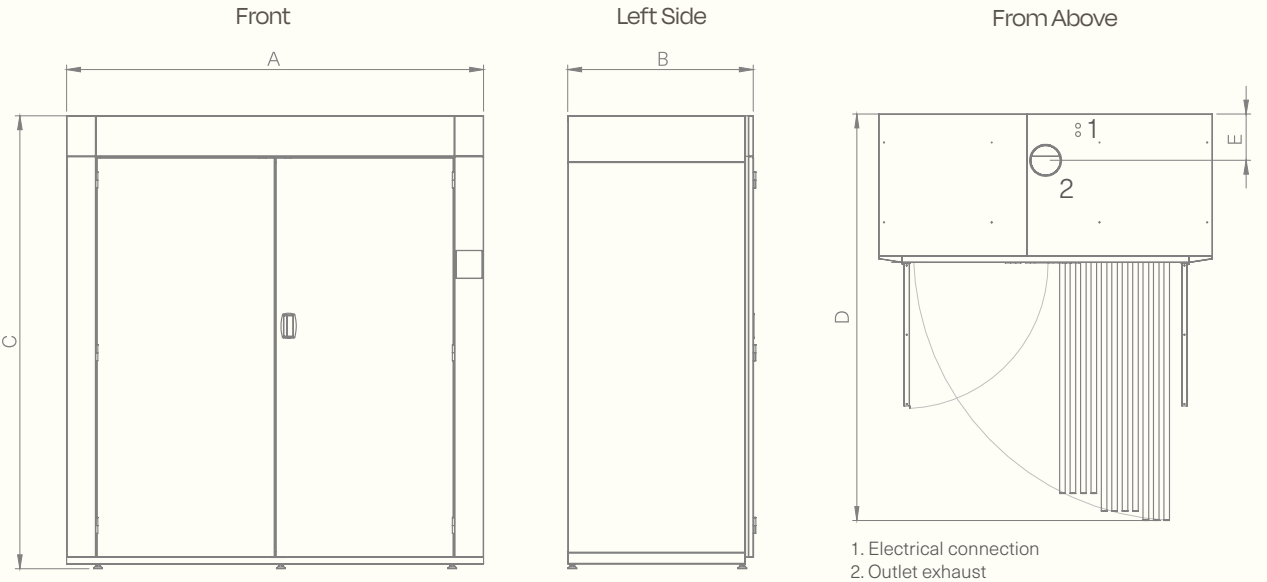

Dimensions in mm (inch)	A	B	C	D	E
	Width	Depth	Height	Depth with hanging rail	Exhaust position from back
TS 93 E	1800 (71))	800 (31.5)	1955 (77)	2192 (204)	250 (9.84)

