

Proline

Drying cabinet TS 63 E/ TS 63 ES

MAIN FEATURES

- Capacity 8 kg (17.6 lbs)
- Hanging length 16 m (52.5 ft)
- Width, 120 cm (47 inch)
- HTS - Humidity Tracking System
- Gentle drying mode
- Four automatic programs and one program for timed drying
- Hanging rail rotates out 180° and doors open 190°
- Double overheat protection for increased security
- Removable top panel for easy installation/handling
- Choose between Swedish, English, Norwegian, Danish, French, German and Spanish display texts
- Delivered ready to use or as an assembling kit

Versatile
garment drying
solutions for
every industry



ProLine TS 63 E is a drying cabinet with very short drying times from 42 minutes and low energy consumption from 2.6 kWh. The drying cabinet is equipped with a Humidity Tracking System (HTS) which senses the humidity level and stops the drying process when the laundry is dry. Drying cabinets are ideal for drying delicate garments that should not be tumble dried. ProLine TS 63 E dries efficiently without friction which extends the life-span of the garments. The drying cabinet is equipped with four automatic programs and one program for timed drying.

HTS - Humidity
Tracking System 


Main data	TS 63 E		TS 63 ES
Variant	3-phase 6.3 kW	1-phase 6.3 kW	1-phase 2.3 kW
Capacity, kg/lbs	8 (17.6)	8	8
Hanging length, m (ft)	16 (52.5)	16	16
Heating effect, kW	6	6	2
Part no	131032	131037	131038

Consumption data, normal temperature*			
Drying time, min	42	42	86
Energy consumption, kWh	3.0	3.0	2.6
Drying Capacity, g/min	62	62	30

*Drying of 6 kg cotton (dry weight), washed and high-spinned to 43% residual moisture, dried to 0 % residual moisture.

Technical specifications Proline TS 63 E/TS 63 ES

Drying Cabinet Variant	TS 63 E		TS 63 ES
	3-phase 6.3 kW	1-phase 6.3 kW	1-phase 2.3 kW
Electrical connections			
Phase/Voltage/Frequency	3~N/400V/50Hz	1~N/230V/50/60Hz	1~N/230V/50/60Hz
Total effect, kW	6.3	6.3	2.3
Fuse, A	10	32	13
Cable length, mm (inch)	2500 (98.4)	2500 (98.4)	2500 (98.4)
Air connections			
Outlet exhaust, ø mm (inch)	125 (4.9)	125 (4.9)	125 (4.9)
Outlet air flow, m³/h (ft³/h)	230 (8122)	230 (8122)	230 (8122)
Pressure drop, max Pa* (psf*)	70 (1.46)	70 (1.46)	70 (1.46)
Optional extras			
Single bar, part no	131070	131070	131070
Assembling kit, part no	131033	131033	131033
Hook rack, set of three, part no	131071	131071	131071
Air exchanger 1 vent., part no	141009	141009	141009
Air exchanger 2 vent., part no	141018	141018	141018
Airborne sound level, dB(A)			
	62	62	62
Weight			
Net, kg (lbs)	145 (320)	145 (320)	145 (320)
Shipping data net, kg (lbs)	159 (351)	159 (351)	
Minimum ceiling height mm (inch)			
	2080 (81.9)	2080 (81.9)	2080 (81.9)
Shipping dimensions WxDxH mm (inch)			
	1250x700x2050 (49.2x27.6x80.7)	1250x700x2050 (49.2x27.6x80.7)	1250x700x2050 (49.2x27.6x80.7)

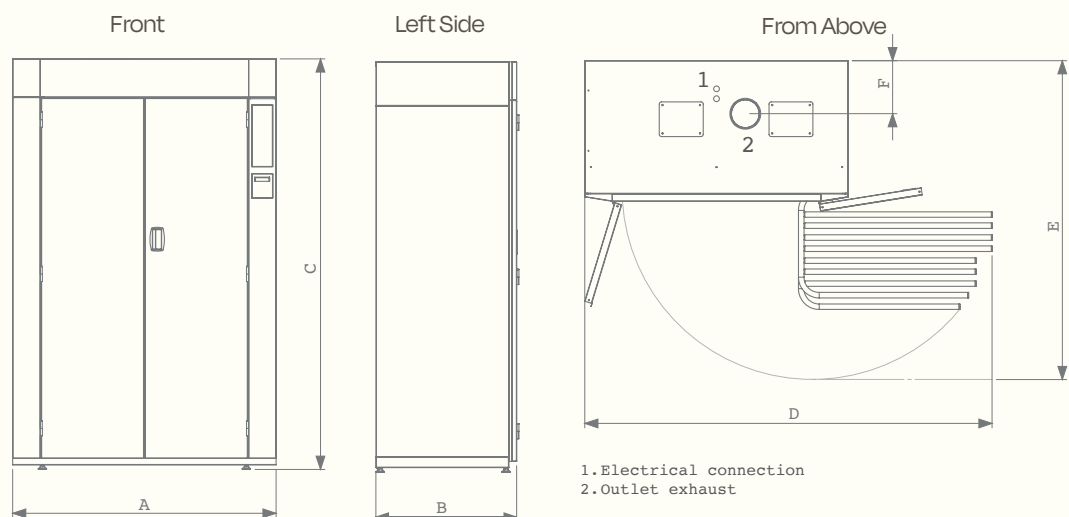

Dimensions in mm (inch)	A	B	C	D	E	F
	Width	Depth	Height	Width with hanging rail	Depth with hanging rail	Exhaust position from back
TS 63 E	1200 (47.2)	640 (25.2)	1870 (73.6)	1855 (73.0)	1453 (57.2)	242 (9.5)
TS 63 ES	1200 (47.2)	640 (25.2)	1870 (73.6)	1855 (73.0)	1453 (57.2)	242 (9.5)

