

## Profine Drying cabinet TS 63 VP

## MAIN FEATURES

- Capacity 8 kg (17.6 lbs)
- Hanging length 16 m (52.5 ft)
- Width, 120 cm (47 inch)
- HTS Humidity Tracking System
- · Gentle drying mode
- Four automatic programs
- Hanging rail rotates out 180° and doors open 190°
- Double overheat protection for increased security
- Removable top panel for easy installation/handling
- Choose between Swedish, English, Norwegian, Danish, French, German and Spanish display texts
- Delivered semi-mounted, top packed as an assembling kit



ProLine TS 63 VP is a new, unique drying cabinet with a heat pump. It has a very low energy consumption of 1.7 kWh. The drying cabinet is equipped with a Humidity Tracking System (HTS) which senses the humidity level and stops the drying process when the laundry is dry. Drying cabinets are ideal for drying delicate garments that should not be tumble dried. ProLine TS 63 VP dries efficiently without friction which extends the life-span of the garments. The drying cabinet is equipped with four automatic program



Main data	TS 63 VP
Capacity, kg/lbs	8 (17.6)
Hanging length, m (ft)	16 (52.5)
Part no	131031

## Consumption data, normal temperature\*


Drying time, min	58
Energy consumption, kWh	1.7
Drying capacity, g/min (oz/min)	45 (1.59)

<sup>\*</sup>Drying of 6 kg cotton (dry weight), washed and high-spinned to 43% residual moisture, dried to 0 % residual moisture.



## Technical specifications Proline TS 63 VP

Drying Cabniet	TS 63 VP	
Electrical connections		
Phase/Voltage/Frequency	3~N/400V/50Hz	
Total effect, kW	1.5	
Fuse, A	10	
Cable length, mm (inch)	2100 (82.7)	
Heat Pump		
Drain pipe, ø mm (inch)	12 (0.47)	
Refrigerant, type	R407C	
Refrigerant, g (oz)	1050 (37)	
Optional extras		
Single bar, part no	131070	
Hook rack, set of three, part no	131071	
Airborne sound level, dB(A)	56	
Weight		
Net, kg (lbs)	165 (364)	
Shipping data net, kg (lbs)	180 (397)	
Minimum ceiling height mm (inch)	2050 (80.7)	

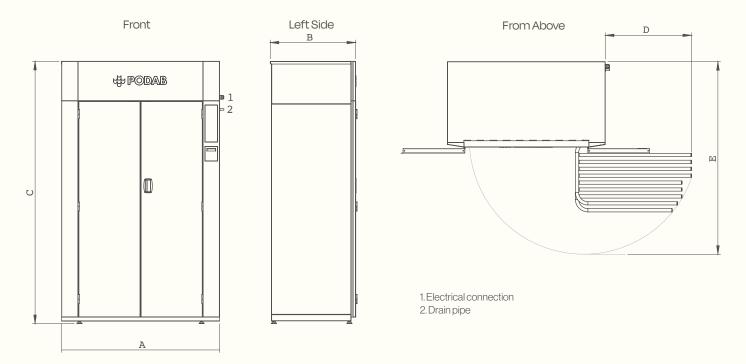

Dimensions in mm (inch)	А	В	С	D	E
	Width	Depth	Height	Width with hanging rail	Depth with hanging rail
TS 63 VP	1200 (47.2)	650 (25.6)	1955 (77)	1857 (73.1)	1465 (57.7)