

Proline

Drying cabinet TS63 HP

MAIN FEATURES

- Capacity 8 kg (17.6 lbs)
- Hanging length 16 m (52.5 ft)
- Width, 120 cm (47 inch)
- HTS - Humidity Tracking System
- Gentle drying mode
- Four automatic programs
- Hanging rail rotates out 180° and doors open 190°
- Double overheat protection for increased security
- Removable top panel for easy installation/handling
- Choose between Swedish, English, Norwegian, Danish, French, German and Spanish display texts
- Delivered semi-mounted, top packed as an assembling kit



Versatile
garment drying
solutions for
every industry

ProLine TS 63 HP is a new, unique drying cabinet with a heat pump. It has a very low energy consumption of 1.7 kWh. The drying cabinet is equipped with a Humidity Tracking System (HTS) which senses the humidity level and stops the drying process when the laundry is dry. Drying cabinets are ideal for drying delicate garments that should not be tumble dried. ProLine TS 63 HP dries efficiently without friction which extends the life-span of the garments. The drying cabinet is equipped with four automatic program

HTS - Humidity
Tracking System 


Main data	TS 63 HP
Capacity, kg/lbs	8 (17.6) 16
Hanging length, m (ft)	(52.5)
Part no	131091

Consumption data, normal temperature*	
	58
Drying time, min	1.7
Energy consumption, kWh	45 (1.59)
Drying capacity, g/min (oz/min)	

*
Drying of 6 kg cotton (dry weight), washed and high-spinned to 43% residual moisture, dried to 0 % residual moisture.

Technical specifications Proline TS 63 HP

Drying Cabinet	TS 63 HP
Electrical connections	
Phase/Voltage/Frequency	3~N/400V/50Hz
Total effect, kW	1.5
Fuse, A	10
Cable length, mm (inch)	2100 (82.7)
Heat Pump	
Drain pipe, ø mm (inch)	12 (0.47)
Refrigerant, type	R407C
Refrigerant, g (oz)	1050 (37)
Optional extras	
Single bar, part no	131070
Hook rack, set of three, part no	131071
Airborne sound level, dB(A)	
	56
Weight	
Net, kg (lbs)	165 (364)
Shipping data net, kg (lbs)	180 (397)
Minimum ceiling height mm (inch)	
	2050 (80.7)

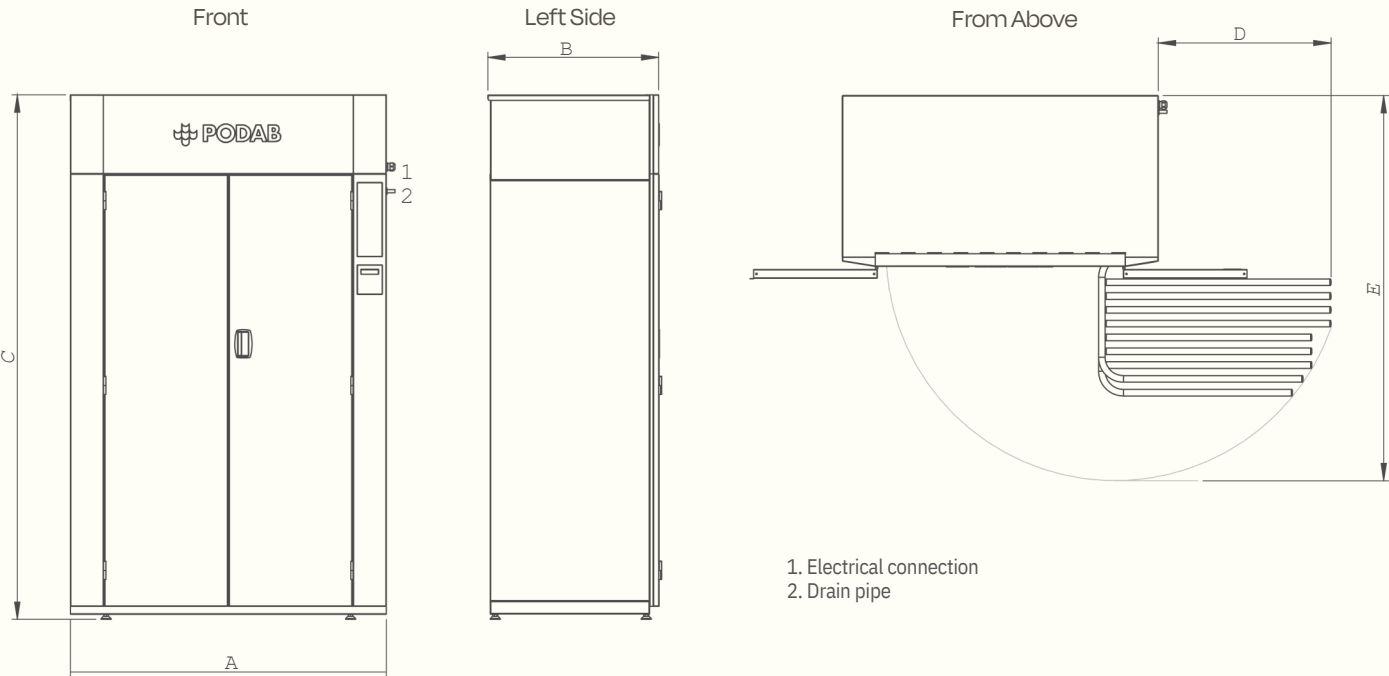

Dimensions in mm (inch)	A	B	C	D	E
	Width	Depth	Height	Width with hanging rail	Depth with hanging rail
TS 63 HP	1200 (47.2)	650 (25.6)	1995 (78.5)	1857 (73.1)	1465 (57.7)

